

All types and sizes of fuse-links with blade contacts are equipped with a visual indicator on the upper lid, which can be used as a releasing device for the signal switch VL50 for remote signalling of fuse operating. VL50 can be used for fuse-links up to 690 V a.c. inclusive.


Signal switch


Type	Product code	Weight [kg]	Packing [pcs.]
VL50	06528	0.015	1

Parameters


Insulation voltage	U_i	2 kV
Rated current/voltage of contacts	I_n	6 A/250 V a.c. 0.1 A/230 V d.c.
Approval marks		

Dimensions

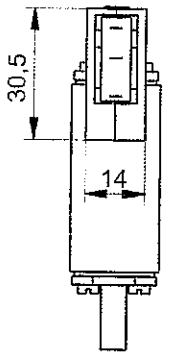

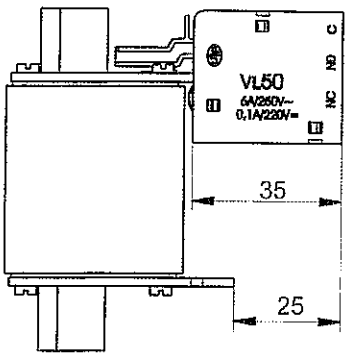

Diagram



State of contacts with signal switch VL50 installed on the fuse-link: fuse-link not operated - C - NC contacts connected